



## TECHNICAL DATA

## Megasport - Interlocking

Sports, multipurpose and for animals floorings

### Product description and Technical Specification

Self-locking pads made of SBR ( Styrene Butadiene ) rubber granules compounded with polyurethane binder with a double T shape, designed for sport areas, pedestrian areas, parking places for light vehicles areas, flooring for animals . The pads are available in the size of 200 mm x 165 mm side with the thickness of 43 mm. The interlocking cut pad execution is a special cut pad suitable to complete the flooring borders.

### On request special colours are available

- Protection upon impact on the ground
- Easy installation and maintenance, non-toxic
- High durability in time



PHYSICAL CHARACTERISTICS	Norm	Unit	Interlocking	Tolerance
Thickness		mm	<b>43</b>	± 1,5%
Length		mm	<b>200</b>	± 1,5%
Width		mm	<b>165</b>	± 1,5%
Weight per piece		kg	<b>1.05</b>	± 5%
Colour	(the colour tone could vary from pad to pad)		<b>red - green - grey</b>	

PHYSICAL AND CHEMICAL PROPERTIES	Norm	Unit	Interlocking	
Fire resistance	EN 13501-1		<b>Efl, E</b>	
Temperature tolerance			<b>- 40° C ; + 80° C</b>	

### PACKING AND STORING

Each pallet is wrapped and protected with waterproof polythene film. Inside storage is recommended to avoid possible water penetration.

### WARNINGS

Make sure all the pads have the same temperature during the entire installation period. Lay down the pads 24 hours before the installation to allow them to get their original dimensions.

Install all the pads in a single laying session in order to guarantee installation under similar conditions.

### INFLUENCE FROM ATMOSPHERIC CONDITIONS

In order to get the idea application environmental conditions the temperature of the application site/place have to be above 4°C for at least 24 hours before the pads application. If the site application has temperature below to 4°C, please keep the pads stored for at least 72 hours before the installation at a temperature above 10°C.

Do not install the pads on sites where the temperature is below at 4°C for long time. The pads have to be stored and installed on shadow in order to avoid pads overheating.

The suggestions and technical information given above represent our knowledge regarding the properties and the product's uses. ISOLGOMMA reserve the right to modify or update this data without prior notice. This document is the property of ISOLGOMMA and all rights are therefore reserved



## TECHNICAL DATA

## Megasport - Interlocking


Sports, multipurpose and for animals floorings

### INSTALLATION INSTRUCTIONS


*The installation surface must be flat, stable and protected from frost. The best substrates are leveled bed of gravel (grain size: 0-7 mm, water-permeable) or concrete. On a gravel base the only possibility is a dry laying; on a rigid base (asphalt, concrete ...) the product can be dry laid or glued.*

#### DRY APPLICATION - Megasport


Start the installation from a corner of the tile surface with a "Interlocking cut V"

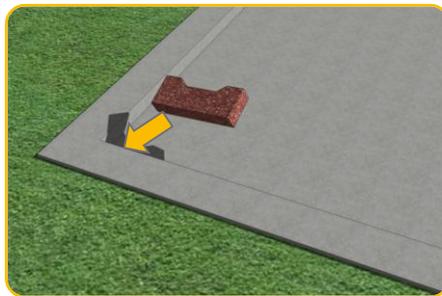


Install the first row of tiles up to the edge of the other side checking for a proper alignment and perpendicularity

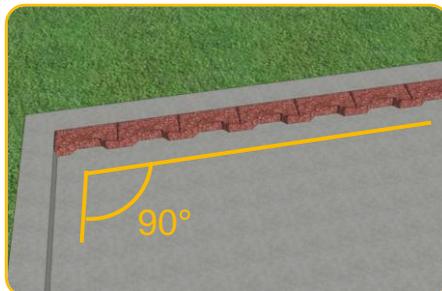

Start the second row with a tile of "Interlocking Cut O"

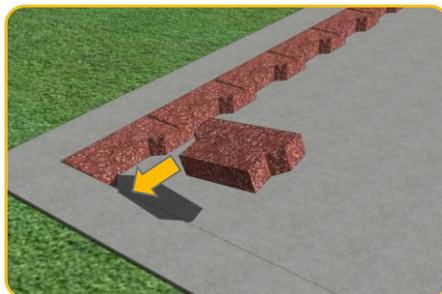


Continue laying tile; lay them closely to avoid gabs in the joints

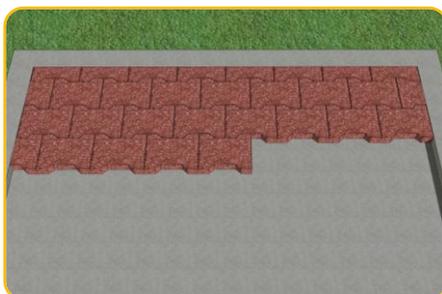


#### DRY APPLICATION - Megastable


Start laying from one side of the walkway or from entrance of the carousel by placing a tile to the edge

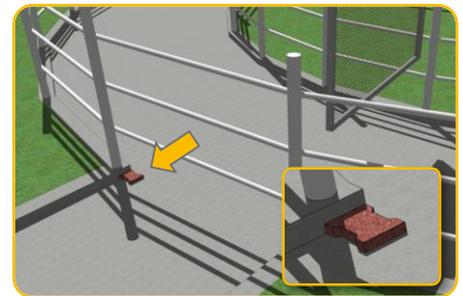


Install the whole tiles in a perpendicular horizontally and vertically direction

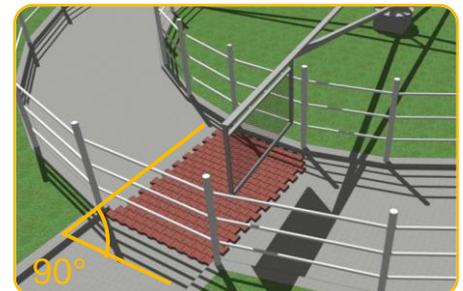

Continue laying the tiles to complete the surface

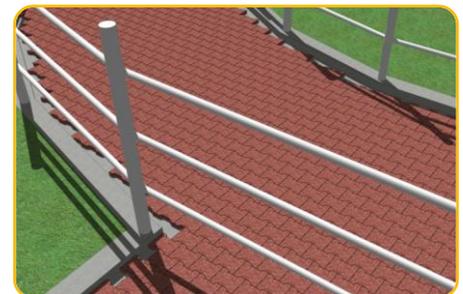

Cut tiles in a proper size and insert them in the blanks: use the special pieces "Cut V" or "Cut O" when possible

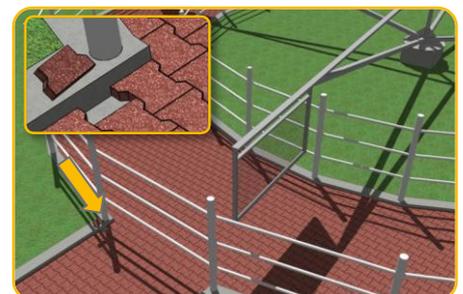

For more information, refer to the installation manual downloaded from the website [www.isolgomma.com](http://www.isolgomma.com)