

Technical Commercial Data Sheet

Perisol

Self-adhesive accessories for detachment of edges



- Ease of application
- Avoid acoustical bridges
- High resistance to deformation
- Perfect adhesion to wall- soil corners
- Great vapour permeability



Description

Self-adhesive detachment strips in closed-cell expanded polyethylene for walls and edges, designed to avoid rigid links between pavements and other structures of the building. Products of PERSIOL range are used in floating floors. They are odorless, rotproof, chemically inactive and mold resistant.

Types (figures above from left to right):

- PERISOL: Rolled strips with self-adhesive band and transparent film;
- PERISOL L: L- shaped self-adhesive strips;
- PERISOL AE: External angle accessory; PERISOL AI: Internal angle accessory;
- PERISOL MP: Door jamb accessory.

Application

- Avoid humid surfaces;
- Clean deeply the surface of walls and remove residuals in order to maximize adhesion;
- Apply Bituver floor soundproofing products covering the whole floor;
- In order to avoid rigid connections between the flooring and the other structures of the building, place the Bituver PERISOL / PERISOL L/AI/AE/MP strips of detachment, placing orthogonal adhesive glued faces respectively to the plane of the floor and to the surfaces of walls and pillars;
- Ensure that the height of the vertical edges of the strips of detachment slightly exceeds the level of finished floor;
- Make a screed of adequate thickness in accordance with expected loads;
- Realize the planned pavement;
- The excess of PERISOL strips has to be trimmed;
- Apply the baseboard, possibly avoiding contact with the elements of the floor.


Recommended Use

Soundproofing of floors from impact noises (floating floors).

Storage

The product is packed in carton boxes. It must be stored in covered, well ventilated places. Keep clear from sources of heat.

product \ measure	PERISOL	PERISOL L	PERISOL AI/AE/MP
Length (m)	25	2	-
Height (mm)	120	100/160/200	100/160



CODE: STCBE 106
REVISION: 00
DATE: APRIL 2012
PAGE: 1/2




Technical Commercial Data Sheet

Perisol

Technical features	Value
Compressive strength with 10% deformation	10,1 kPa
Working temperatures	Da -10 °C a +80 °C
Specific weight	22/25 kg/m ³
Conventional toxicity index	10
Smoke index	7
Smoke class	F1

Application scheme

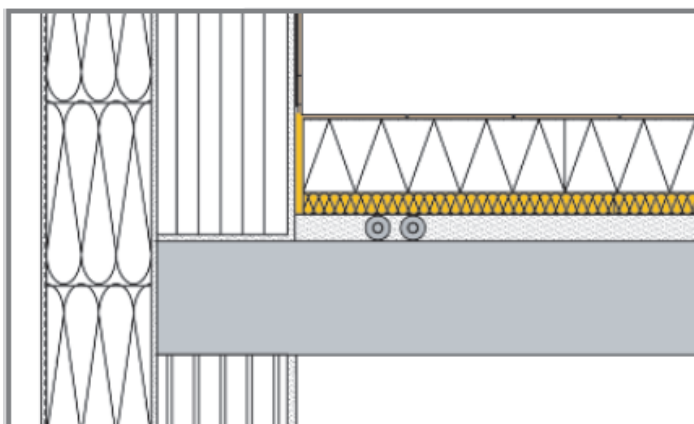

The Sain-Gobain PPC Italia S.p.A. quality system is certified according to EN ISO 9001.

Our products foresee proper application and storage modalities.

Saint Gobain PPC Italia has the right to carry out the changes or variations believed to be proper any time with no need of notice



CODE: STCBE 106
REVISION: 00
DATE: APRIL 2012
PAGE: 2/2

Saint-Gobain PPC Italia S.p.A. – Isover Activity

Via Ettore Romagnoli, 6 – 20146 Milano

Customer Service Bituver: Via G.Pastore, 15 - 66013 Chieti Scalo (CH) - Tel. +39 0871/588021 - Fax +39 0871/ 552483

www.bituver.it

